



PRODUCT CATALOGUE

PROUDLY AUSTRALIAN MADE

LADaMAX[®]

AUSTRALIA'S LADDER SPECIALIST

STATIC
PLATFORM TEST LOAD
500KG
EXCEEDS THE STANDARD
LADaMAX

LADaMAX

PLATFORM STEP

500KG


PLATFORM STEP

500KG

PLATFORM STEP

LADaMAX

LADaMAX[®]

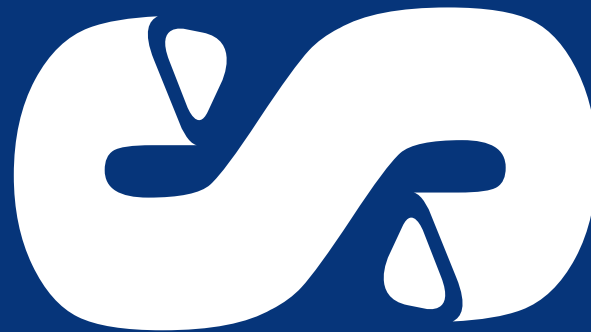

SWAGELOCK

ULTIMATE FAILSAFE

SUPERIOR METHOD OF TREAD RUNG CONNECTION
INCREASE TORTIONAL STIFFNESS
REDUCES TWIST
INCREASES LIFE SPAN
& QUITE SIMPLY SAVES LIVES

LADaMAX[®] IS PROUDLY AUSTRALIAN MADE AND OWNED



STEPLADDERS

- Failsafe step can never shear (NORMAL USE)
- Double hollow step tread, processed and swaged through siderails
- Up to 50% increase in torsional rigidity over riveted step ladder frames
- No rivets to shear OR rust
- Reduces frame twist
- No holes to elongate



SINGLE SCAFFOLD & EXTENSION LADDERS

- Strongest 'D' shape rung FLAT TOP FOR SAFETY
- Internal crimp wall and external swage is the strongest and safest connection of all
- Increased torsional rigidity
- Less twist
- Failsafe

LADaMAX's focus has been - and always will be - to establish a reputation as Australia's leading safety brand, manufacturing only premium quality industrial product proudly manufactured in Australia.

In the industry for 20+ years, LADaMAX can proudly state ZERO claims on all ladder frames produced.

This is a world class safety record, possibly second to none in the world today.

Australian owned, Australian made and using only Australian materials, LADaMAX will ensure that we offer a safer choice for all Australian and international users. The LADaMAX team are 100% committed to ensure that LADaMAX is the most responsive and caring ladder company in the industry.

GLEN BAILEY
DIRECTOR



LADaMAX[®] EXCLUSIVELY USES SWAGELOCK IN ALL PRODUCTS

PLATFORM

ULTIMATE FAILSAFE



TESTED TO
500kg

LADaMAX[®]

SUPERIOR PLATFORM

DESIGN ENSURES MAXIMUM SAFETY

FIRST LINE OF SAFETY

PLATFORM

Aluminium extruded platform (NOT PLASTIC) to ensure it lasts in harsh Australian UV climate. Extra rib support to add extra strength and support. Connected with 8mm solid fasteners to side rail.



SECOND LINE OF SAFETY

TREAD + SWAGELOCK

Fully supporting the platform is our Swagelock step tread which ensures failsafe protection and support. In the event of huge overload LADaMAX step tread may bend but not collapse. Double hollow extrusion to maximise strength, on every LADaMAX platform. Increases torsional rigidity and reduces twist (no rivets to shear).



THIRD LINE OF SAFETY

PLATFORM DOUBLE BRACING

Front and rear double bracing under every LADaMAX platform. These connect step tread to side rail to ensure a third line of support and reduce twist and sideways movement.



ONLY LADAMAX OFFERS THESE EXTRA FAILSAFE DESIGNS FOR YOUR PROTECTION AND SAFETY

20+ YEARS AND ZERO CLAIMS ON ALL LADaMAX[®] PRODUCTS

FIBREGLASS PLATFORM STEP LADDERS

150KG RATED | AS 1892




FIBREGLASS PREMIUM RANGE

- **UV RESISTANT FIBREGLASS** - lasts longer and better value
- **Safest failsafe platform (500kg Load test)**
- **Stronger full gusset base brace - "GUSSET GUTZ"**
- **Stronger RHS rear frame**
- **Swagelock step connection 50% stronger**
- **Strongest plated foot connection**
- **Lightweight**

OPTIONS



SAFETY GATE



PLATFORM KICKBOARD



CASTOR KIT



CODE	PLATFORM HEIGHT (m)	WIDTH (mm)	WEIGHT (kg)	TRANSPORT CUBE (m ³)
FPS6-3	0.88	620	12	.39
FPS7-4	1.17	660	14	.45
FPS8-5	1.45	700	16	.51
FPS9-6	1.74	740	18	.57
FPS10-7	2.02	780	20	.63
FPS11-8	2.30	820	22	.69
FPS13-10	2.89	1050	29	1.22



FIBREGLASS STANDARD RANGE

- **UV RESISTANT FIBREGLASS** - lasts longer and better value
- **Safest failsafe platform (500kg Load test)**
- **Stronger full gusset base brace - "GUSSET GUTZ"**
- **Channel section rear frame**
- **Swagelock step connection 50% stronger**
- **Strongest plated foot connection**
- **Lightweight**

OPTIONS



SAFETY GATE



PLATFORM KICKBOARD



CASTOR KIT



CODE	PLATFORM HEIGHT (m)	WIDTH (mm)	WEIGHT (kg)	TRANSPORT CUBE (m ³)
FPS6-3G	0.88	620	11	.26
FPS7-4G	1.17	660	13	.32
FPS8-5G	1.45	700	15	.39
FPS9-6G	1.74	740	17	.46
FPS10-7G	2.02	780	19	.63
FPS11-8G	2.30	820	21	.69

All measurements are nominal and do not indicate 'exact weights and measures'



ALUMINIUM PLATFORM STEP LADDERS

150KG RATED | AS 1892

ALUMINIUM PREMIUM RANGE

- Safest failsafe platform (500kg load test)
- Stronger full gusset base brace - "GUSSET GUTZ"
- RHS rear frame
- Swagelock step connection 50% stronger
- Strongest plated foot connection

OPTIONS



SAFETY GATE



PLATFORM
KICKBOARD



CASTOR KIT



CODE	PLATFORM HEIGHT (m)	WIDTH (mm)	WEIGHT (kg)	TRANSPORT CUBE (m³)
PS6-3	0.88	620	11	.39
PS7-4	1.17	660	12	.45
PS8-5	1.45	700	14	.51
PS9-6	1.74	740	16	.57
PS10-7	2.02	780	18	.63
PS11-8	2.30	820	20	.69
PS13-10	2.89	860	32	1.22
PS15-12	3.45	1050	35	1.4

ALUMINIUM STANDARD RANGE

- Safest failsafe platform (500kg Load test)
- Stronger full gusset base brace - "GUSSET GUTZ"
- Channel section rear frame
- Swagelock step connection 50% stronger
- Strongest plated foot connection

OPTIONS



SAFETY GATE



PLATFORM
KICKBOARD



CASTOR KIT



CODE	PLATFORM HEIGHT (m)	WIDTH (mm)	WEIGHT (kg)	TRANSPORT CUBE (m³)
PS6-3G	0.88	620	10	.39
PS7-4G	1.17	660	11	.45
PS8-5G	1.45	700	13	.51
PS9-6G	1.74	740	14	.57
PS10-7G	2.02	780	16	.63
PS11-8G	2.30	820	18	.69

All measurements are nominal and do not indicate 'exact weights and measures'

MOBILE ORDER PICKER WAREHOUSE RANGE

150KG RATED | AS 1892



ALUMINIUM WAREHOUSE RANGE

- Safest failsafe platform (500kg Load test)
- World's **safest** aluminium platform
- **Stronger** full gusset base brace - "GUSSET GUTZ"
- Complete mobility castors
- Safety integrated hand rail



OPTIONS



SAFETY GATE




PLATFORM
KICKBOARD

CODE	PLATFORM HEIGHT (m)	WIDTH (mm)	WEIGHT (kg)	TRANSPORT CUBE (m³)
SM6-3	0.88	620	11	.39
SM7-4	1.17	660	12	.45
SM8-5	1.45	700	14	.51
SM9-6	1.74	740	16	.57
SM10-7	2.02	780	18	.63
SM11-8	2.30	820	20	.69

NON-CONDUCTIVE
SAFE FOR ELECTRICAL WORK

FIBREGLASS WAREHOUSE RANGE

- UV RESISTANT FIBREGLASS - lasts longer and better value
- Safest failsafe platform (500kg Load test)
- **Stronger** full gusset base brace - "GUSSET GUTZ"
- World's **safest** aluminium platform
- Complete mobility castors
- Safety integrated hand rail



OPTIONS



SAFETY GATE



PLATFORM
KICKBOARD

CODE	PLATFORM HEIGHT (m)	WIDTH (mm)	WEIGHT (kg)	TRANSPORT CUBE (m³)
FSM6-3	0.88	620	12	.39
FSM7-4	1.17	660	14	.45
FSM8-5	1.45	700	16	.51
FSM9-6	1.74	740	18	.57
FSM10-7	2.02	780	20	.63
FSM11-8	2.30	820	22	.69

All measurements are nominal and do not indicate 'exact weights and measures'

STEP LADDERS SINGLE SIDED

150KG RATED | AS 1892

ALUMINIUM SINGLE SIDED STEP LADDER

- Swagelock step connection
50% stronger
- **Stronger** full gusset base
brace - "GUSSET GUTZ"
- Side arm locks
- **Strongest** foot connection
- **Lightweight**



CODE	LENGTH (m)	WIDTH (mm)	WEIGHT (kg)	TRANSPORT CUBE (m³)
SS042	1.20	470	5	0.07
SS062	1.80	545	7	0.12
SS082	2.40	620	9	0.19
SS102	3.00	695	14	0.26
SS122	3.60	770	16	0.35

All measurements are nominal and do not indicate 'exact weights and measures'

NON-CONDUCTIVE
SAFE FOR ELECTRICAL WORK

FIBREGLASS SINGLE SIDED STEP LADDER

- **UV RESISTANT FIBREGLASS** -
lasts longer and better value
- Swagelock step connection
50% stronger
- **Stronger** full gusset base
brace - "GUSSET GUTZ"
- Side arm locks
- **Strongest** plated foot
connection
- **Lightweight**



CODE	LENGTH (m)	WIDTH (mm)	WEIGHT (kg)	TRANSPORT CUBE (m³)
FSS042	1.20	470	5	0.17
FSS062	1.80	545	11	0.21
FSS082	2.40	620	15	0.26
FSS102	3.00	695	19	0.36
FSS122	3.60	770	23	0.49

STEP LADDERS DOUBLE SIDED

150KG RATED | AS 1892



ALUMINIUM DOUBLE SIDED STEP LADDER

- Swagelock step connection 50% stronger
- Stronger full gusset base brace - "GUSSET GUTZ"
- Side arm locks
- Strongest foot connection
- Lightweight



CODE	LENGTH (m)	WIDTH (mm)	WEIGHT (kg)	TRANSPORT CUBE (m³)
DS032	0.90	435	7	0.07
DS042	1.20	470	8	0.1
DS062	1.80	545	10	0.17
DS082	2.40	620	13	0.26
DS102HA	3.00	695	20	.36
DS122HA	3.60	770	22	0.49
DS142HA	4.20	845	32	0.62
DS162HA	4.80	920	40	0.77

NON-CONDUCTIVE
SAFE FOR ELECTRICAL WORK

FIBREGLASS DOUBLE SIDED STEP LADDER

- UV RESISTANT FIBREGLASS - lasts longer and better value
- Swagelock step connection 50% stronger
- Stronger full gusset base brace - "GUSSET GUTZ"
- Side arm locks
- Strongest plated foot connection
- Lightweight



CODE	LENGTH (m)	WIDTH (mm)	WEIGHT (kg)	TRANSPORT CUBE (m³)
FDS032	0.90	435	6	0.07
FDS042	1.20	470	8	0.1
FDS062	1.80	545	12	0.17
FDS082	2.40	620	16	0.26
FDS102	3.00	695	22	0.36
FDS122	3.60	770	26	0.49

All measurements are nominal and do not indicate 'exact weights and measures'

EXTENSION LADDERS

150KG RATED | AS 1892

ALUMINIUM EXTENSION LADDERS

- Interlocking side rails for **safety** and **stability**
- **Strongest** flat top 'D' rung
- Easy flow rope system
- Large flat feet
- Swagelock 'D' rung connection **stronger**
- Braided rope
- **Lightweight**



CODE	LENGTH (m)	WIDTH (mm)	WEIGHT (kg)	TRANSPORT CUBE (m³)
XT082	2.4/3.9	420	14	0.14
XT102	3.0/5.1	420	17	0.18
XT122	3.6/6.3	420	20	0.22
XT142	4.2/7.5	420	23	0.25
XT162	4.8/8.4	420	27	0.29
XT182	5.4/9.6	420	31	0.32
XT202	6.0/10.8	420	33	0.36

All measurements are nominal and do not indicate 'exact weights and measures'


NON-CONDUCTIVE
SAFE FOR ELECTRICAL WORK

FIBREGLASS EXTENSION LADDERS

- **Purpose designed** for electrical contractors
- **Rung replacement** system available
- **Easy slide** acetal blocks
- **Easy flow** braided rope system
- **UV inhibitors**
- Interlocking side rails for **safety**, **rigidity** and **stability**
- **Strongest** flat top 'D' rung
- **Large solid ladder boots** – for extra support
- Upper section is free of rope
- Pole chain as standard
- Adjustable roping position (Top Iron)
- **Lightweight**



POWER-MAX
ULTIMATE ELECTRICAL FAILSAFE



CODE	LENGTH (m)	WIDTH (mm)	WEIGHT (kg)	TRANSPORT CUBE (m³)
FXT082	2.7/3.9	390/405	17	0.18
FXT102	3.3/5.1	390/405	20	0.22
FXT122	3.9/6.3	390/405	25	0.25
FXT142	4.5/7.5	390/405	28	0.29
FXT162	5.1/8.5	390/405	31	0.34

DUAL PURPOSE STEP & STRAIGHT

150KG RATED | AS 1892



ALUMINIUM DUAL PURPOSE LADDER

- Swagelock step connection **50% stronger**
- **Stronger** full gusset base brace - "GUSSET GUTZ"
- More **stable** tapered rear frame
- Stainless steel connectors
- **Strongest** foot connection
- **Lightweight**



CODE	LENGTH (m)	WIDTH (mm)	WEIGHT (kg)	TRANSPORT CUBE (m³)
SE062	1.8/3.0	545	9	0.17
SE072	2.1/3.6	585	10	0.21
SE082	2.4/4.2	625	11	0.26

NON-CONDUCTIVE
SAFE FOR ELECTRICAL WORK

FIBREGLASS DUAL PURPOSE LADDER

- **UV RESISTANT FIBREGLASS** - lasts longer and better value
- Swagelock step connection **50% stronger**
- **Stronger** full gusset base brace - "GUSSET GUTZ"
- More **stable** tapered rear frame
- Stainless steel connectors
- **Strongest** plated foot connection
- **Lightweight**



CODE	LENGTH (m)	WIDTH (mm)	WEIGHT (kg)	TRANSPORT CUBE (m³)
FSE062	1.8/3.0	545	10	0.17
FSE072	2.1/3.6	585	12	0.21
FSE082	2.4/4.2	625	14	0.26

All measurements are nominal and do not indicate 'exact weights and measures'

SCAFFOLD LADDERS

150KG RATED | AS 1892

FIBREGLASS SCAFFOLD LADDERS

- **UV RESISTANT FIBREGLASS** - lasts longer and better value
- **Lightweight**, channel section, side rail, large flat top 'D' aluminium rung
- **Strength**, Swagelock 'D' Aluminium rung connection **stronger**
- Rung braces to increase **stability** and **rigidity**
- **Solid foundation**, large solid base boots - plated for extra support



CODE	LENGTH (m)	WIDTH (mm)	WEIGHT (kg)	TRANSPORT CUBE (m³)
FSI082	2.4	365	8	0.08
FSI102	3.0	365	9	0.09
FSI122	3.6	365	10	0.11
FSI142	4.2	365	12	0.13
FSI162	4.8	365	14	0.15
FSI182	5.4	365	16	0.17

All measurements are nominal and do not indicate 'exact weights and measures'

ALUMINIUM SCAFFOLD LADDERS

- Channel section 2.4m-4.2m
- **Stronger** I-Beam section 4.8m-6.0m
- Possibly the **lightest** and **strongest** single scaffold ladder made
- Large flat feet
- Swagelock 'D' rung connection **stronger**
- **Lightweight**



CODE	LENGTH (m)	WIDTH (mm)	WEIGHT (kg)	TRANSPORT CUBE (m³)
SI082	2.4	360	8	0.07
SI102	3.0	360	9	0.09
SI122	3.6	360	10	0.10
SI142	4.2	360	12	0.12
SI162	4.8	360	14	0.14
SI182	5.4	360	16	0.16
SI202	6.0	360	18	0.17

SCAFFOLD LADDERS

120KG RATED | AS 1892

ERECTOR- SCAFFOLD LADDERS

- Special designed hooks - **strong and secure** connection to scaffold transom
- Welded secure **heavy duty** side plates
- Folding platform
- **Lightweight**



CODE	LENGTH (m)	WIDTH (mm)	WEIGHT (kg)
ESI	1.965	405	7.23

All measurements are nominal and do not indicate 'exact weights and measures'





PROUDLY AUSTRALIAN MADE

LADaMAX®

AUSTRALIA'S LADDER SPECIALIST

www.ladamax.com.au 
admin@ladamax.com.au 
07 3205 7698 